

BEST AVAILABLE COPY

PATENT COOPERATION TREATY

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner  
 US Department of Commerce  
 United States Patent and Trademark  
 Office, PCT  
 2011 South Clark Place Room  
 CP2/5C24  
 Arlington, VA 22202  
 ETATS-UNIS D'AMERIQUE  
 in its capacity as elected Office

<b>Date of mailing</b> (day/month/year) 02 November 2000 (02.11.00)	
<b>International application No.</b> PCT/DK00/00086	<b>Applicant's or agent's file reference</b> 24446 PC 1
<b>International filing date</b> (day/month/year) 01 March 2000 (01.03.00)	<b>Priority date</b> (day/month/year) 01 March 1999 (01.03.99)
<b>Applicant</b> JENSEN, Erik	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:  
 20 September 2000 (20.09.00)

☐ in a notice effecting later election filed with the International Bureau on:  
 \_\_\_\_\_

2. The election ☒ was  
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<b>The International Bureau of WIPO</b> 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	<b>Authorized officer</b> R. E. Stoffel Telephone No.: (41-22) 338.83.38
--	--

09/91177

Copy for the Elected Office (EO/US)

PCT/DK00/00086

## PATENT COOPERATION TREATY

BEST AVAILABLE COPY

PCT

NOTIFICATION OF THE RECORDING  
OF A CHANGE(PCT Rule 92bis.1 and  
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

INTERNATIONALT PATENT-BUREAU  
Høje Taastrup Boulevard 23  
DK-2630 Taastrup  
DANEMARKRECEIVED  
DEC 14 2001  
TC 3700 MAIL ROOM

Date of mailing (day/month/year) 09 November 2001 (09.11.01)	
Applicant's or agent's file reference 24446 PC 1	IMPORTANT NOTIFICATION
International application No. PCT/DK00/00086	International filing date (day/month/year) 01 March 2000 (01.03.00)

## 1. The following indications appeared on record concerning:

☐ the applicant
 ☐ the inventor
 ☒ the agent
 ☐ the common representative

## Name and Address

 PLOUGMANN, VINGTOFT & PARTNERS  
 P.O. Box 3007  
 DK-1021 Copenhagen K  
 Denmark

State of Nationality

State of Residence

Telephone No.

+45 33 63 93 00

Facsimile No.

+45 33 63 96 00

Teleprinter No.

RECEIVED  
DEC 26 2001  
TC 1700

## 2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☒ the person
 ☐ the name
 ☐ the address
 ☐ the nationality
 ☐ the residence

## Name and Address

 INTERNATIONALT PATENT-BUREAU  
 Høje Taastrup Boulevard 23  
 DK-2630 Taastrup  
 Denmark

State of Nationality

State of Residence

Telephone No.

+45 43 99 55 11

Facsimile No.

+45 43 99 99 11

Teleprinter No.

## 3. Further observations, if necessary:

## 4. A copy of this notification has been sent to:

☒ the receiving Office
 ☐ the designated Offices concerned  
☐ the International Searching Authority
 ☒ the elected Offices concerned  
☒ the International Preliminary Examining Authority
 ☐ other:

 The International Bureau of WIPO  
 34, chemin des Colombettes  
 1211 Geneva 20, Switzerland

Authorized officer

François BAECHLER

Facsimile No.: (41-22) 740.14.35

Telephone No.: (41-22) 338.83.38

COURTESY COPY OF THE  
INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT WITH ANNEXES.  
THE ANNEXES HERETO ARE THE  
AMENDMENTS PREVIOUSLY MADE UNDER  
PCT ARTICLE 19. THESE ARE THE  
CLAIMS THAT ARE TO BE USED FOR  
EXAMINATION.

09/912771

Jb

## PATENT COOPERATION TREATY

## PCT

REC'D 19 JUN 2001

WIPO PCT

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference 24446 PC 1	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/DK00/00086	International filing date (day/month/year) 01/03/2000	Priority date (day/month/year) 01/03/1999
International Patent Classification (IPC) or national classification and IPC B01D3/08		
Applicant JENSEN, Erik		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 4 sheets, including this cover sheet.
  - ☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 3 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☒ Certain observations on the international application

RECEIVED



JAN 14 2002

TC 1700

RECEIVED

JAN 15 2002

TC 1700

Date of submission of the demand 20/09/2000	Date of completion of this report 15.06.2001
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Tragoustis, M Telephone No. +49 89 2399 8623 

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/DK00/00086

## I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

**Description, pages:**

1-10 as originally filed

**Claims, No.:**

1-13 as amended under Article 19

**Drawings, sheets:**

1/5-5/5 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/DK00/00086

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

### 1. Statement

Novelty (N)	Yes: Claims 1-13
	No: Claims
Inventive step (IS)	Yes: Claims 1-13
	No: Claims
Industrial applicability (IA)	Yes: Claims 1-13
	No: Claims

2. Citations and explanations  
**see separate sheet**

## VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:  
**see separate sheet**

1. The application relates to an apparatus for rectification of liquid mixtures or for scrubbing of gases.

An apparatus comprising an elongated processing chamber divided into interconnected sections by means of a plurality of guide plates as defined in the preamble of claim 1 is known from DE-A-1054421.

By the characterising features of claim 1, i.e. by the rotor equipped with collecting chambers having a U-shaped cross-section opening through which upon rotation the liquid is thrown towards the inner wall of the processing chamber in the form of rotating carpet-like patterns of droplets, a very efficient contact between gas and liquid is obtained.

In DE-A-1054421 the rotor does not have any liquid collecting chambers but instead rotating cylindrical brushes are provided.

EP-A-0494154 discloses a scrubbing apparatus which comprises an elongated processing chamber, which chamber is not divided into interconnected sections as the apparatus of claim 1. The rotor in this known apparatus has liquid collecting chambers which do not have a U-shaped cross-section opening but instead the liquid is thrown out of the collecting chambers by means of holes provided in the circumferential wall of each collecting chamber.

The scrubbing apparatus disclosed in SU-A-1544-463 (cf. english abstract) comprises a casing with sprays on a rotating shaft.

Hence the documents of the Search Report do not render obvious the apparatus of claim 1 either alone or in combination.

Claim 1 and the dependent claims 2-13 meet thus the requirements of Art. 33 PCT.

2. The description (see paragraph bridging pages 2,3) is not adapted to claim 1 (Art. 6 PCT).

**COURTESY COPY OF  
AMENDMENTS TO THE  
CLAIMS UNDER PCT  
ARTICLE 19**



1

## Claims

1. An apparatus for rectification of liquid mixtures and/or for scrubbing of gases, said apparatus comprising
- 5 an elongated processing chamber (1) extending in a substantially horizontal direction and being divided into interconnected sections or stages by means of a plurality of guide plates (7-9; 20, 21) each extending across a major part of the cross-section of the processing chamber,
- means (14) for supplying liquid into the processing chamber at a first end thereof,
- 10 means (12) for discharging liquid from the processing chamber at an opposite second end thereof,
- a liquid atomising means (2a) arranged at the bottom of the processing chamber and extending along at least a major part of the length of the chamber for repeatedly throwing supplied liquid transversely to the longitudinal axis of the processing chamber,
- 15 means (10) for supplying gas into the processing chamber at said second end, and
- means (11) for discharging gas from the processing chamber at said first end so as to obtain a generally counter-current movement of liquid and gas through the processing chamber
- 20 characterised in that the liquid atomising means (2a) comprise a rotor (2) defining liquid collecting pockets or chambers (22) having a U-shaped cross-section opening in the direction of rotation and being adapted to throw the liquid so as to form rotating carpet-like patterns of droplets extending from the outer edge (16) of each pocket towards the inner wall of the processing chamber.
- 25
2. An apparatus according to claim 1, wherein the liquid atomising means (2a) further comprise the bottom part of the processing chamber, which at opposite ends thereof is in communication with the liquid supply means (14) and the liquid discharging means (12), respectively, at least the lower part of the rotor dipping into liquid collected at said bottom
- 30 part.
3. An apparatus according to claim 2, wherein the liquid atomising means (2a) further comprise a liquid receiving chamber or channel (25) for receiving liquid flowing downwards along the inner peripheral wall of the processing chamber, the liquid receiving

AMENDED SHEET (ARTICLE 10)

JK 00/000 86

2

channel (25) communicating with the bottom part of the processing chamber via an adjustable, longitudinally extending opening or slot (28).

4. An apparatus according to claim 3, wherein the liquid receiving channel (25) is defined  
5 between the peripheral inner wall of the processing chamber and a flap or plate member (26) being pivotal about a longitudinal axis so as to allow adjustment of a space or slot (28) defined between the lower edge of the flap member and the adjacent part of the inner wall of the processing chamber.
- 10 5. An apparatus according to any of the claims 1-4, wherein the processing chamber is defined by a peripheral wall and a pair of opposite end walls (3), at least one of the end walls comprising a releasable end wall part (4) covering an opening, which is defined in the upper part of the end wall, said opening having dimensions sufficient to allow insertion of guide plates into the chamber through such opening.
- 15 6. An apparatus according to claim 5, wherein the releasable end wall part is in the form of a cover (4) with a flange connected to the end wall by screws or bolts.
7. An apparatus according to any of the claims 1-6, wherein the inner peripheral wall (5) of  
20 the processing chamber comprises means (37-39) for releasable fastening said guide plates (7-9; 20,21) at any of axially spaced, predetermined positions.
8. An apparatus according to claim 7, wherein the releasable fastening means comprise annular flanges (37) fastened to and extending radially inwardly from said inner peripheral  
25 chamber wall.
9. An apparatus according to any of the claims 1-8, wherein the guide plates (7-9; 20, 21) extend substantially at right angles to the longitudinal axis of the processing chamber (1).
- 30 10. An apparatus according to any of the claims 1-9, wherein consecutive guide plates are formed and arranged so as to force gas flowing from the gas supplying means (10) to the gas discharge means (11) to follow a tortuous path and to flow in opposite, transverse directions.

AMENDED SHEET (ARTICLE 19)

CLAIM/24446PC1/PEH/ah/26-07-00

Last printed 27/07/00 12:48

27/07 '00 JEU 12:07 [N° TX/RX 8335]

DK 00/00086

3

11. An apparatus according to any of the claims 1-10, wherein at least some of the guide plates define or comprise conduits (33) for a heating or cooling fluid.

12. An apparatus according to any of the claims 1-11, further comprising conveyor means  
5 (34) for removing solid matter separated in the processing chamber from the bottom part thereof.

13. An apparatus according to claim 12, wherein the conveyor means comprise a screw conveyor (34) including a cylindrical housing (35) communicating with the lower part of the  
10 processing chamber.


AMENDED SHEET (ARTICLE 18)



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>B01D 3/08, 47/18, 53/78</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/51702</b> <b>(43) International Publication Date:</b> 8 September 2000 (08.09.00)
<b>(21) International Application Number:</b> PCT/DK00/00086 <b>(22) International Filing Date:</b> 1 March 2000 (01.03.00) <b>(30) Priority Data:</b> PA, 1999 00272      1 March 1999 (01.03.99)      DK <b>(71)(72) Applicant and Inventor:</b> JENSEN, Erik [DK/DK]; Frændvej 27, DK-2860 Søborg (DK). <b>(74) Agent:</b> PLOUGMANN, VINGTOFT & PARTNERS; P.O. Box 3007, DK-1021 Copenhagen K (DK).		<b>(81) Designated States:</b> AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>With amended claims.</i>

**(54) Title:** AN APPARATUS FOR RECTIFICATION OF LIQUID MIXTURES AND/OR FOR SCRUBBING OF GASES

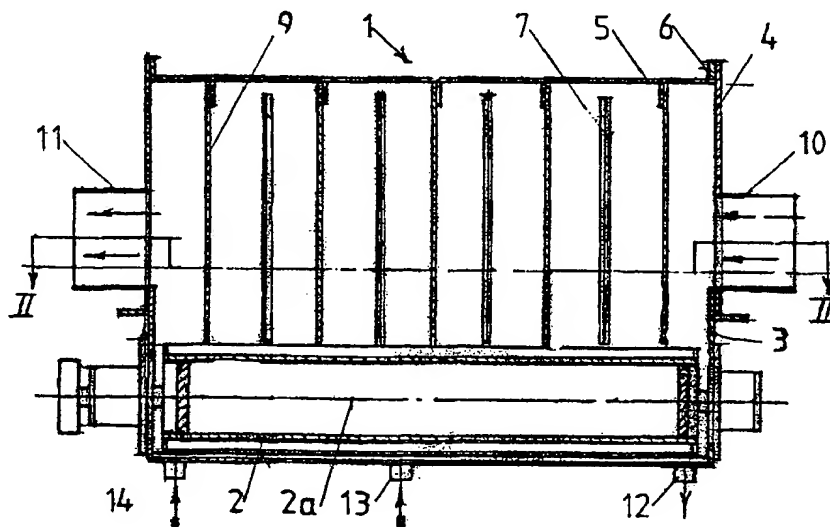**(57) Abstract**

An apparatus for rectification liquids and/or for scrubbing of gases has an elongated, horizontally extending, cylindrical process chamber or housing (1). A liquid and a gaseous phase are passed counter-currently through the apparatus. The liquid is thrown outwardly towards the peripheral housing wall (5) by means of a rotor (2) extending along the bottom of the housing. Liquid flowing downwards along the peripheral housing wall (5) is collected in an upwardly open channel (25) and the liquid collected therein may be supplied to the rotor via an adjustable slot or opening (28). Transversely extending, axially spaced guide plates (7-9) are arranged within the housing (1) so as to define a tortuous path for the gas phase flowing through the housing.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

An apparatus for rectification of liquid mixtures and/or for scrubbing of gases

The present invention relates to an apparatus for rectification of liquid mixtures and/or for scrubbing of gases.

5

Apparatuses for rectification of liquid mixtures and apparatuses for scrubbing of gases function in principle in the same way, namely by causing the atomised liquid and the gas phase to flow counter-currently and thus to come into mutual contact. The reason why apparatuses for rectification and apparatuses for gas scrubbing have usually been built differently is that the reaction between the gas and the liquid phases is different in the two kinds of apparatuses. In rectification heat and substance is transferred between liquid and vapour when the heat transmission coefficient is high. For high viscosity mixtures, however, a high atomising velocity is necessary. In gas scrubbing the washing liquid in an atomised condition and the gas to be purified are caused to flow counter-currently at a high velocity. It has been found, however, that the solid particles entrained by the gas may avoid to come into contact with liquid and to be removed from the gas when the velocity of the liquid droplets is relatively low. In gas scrubbing centrifugal pumps are usually used for atomising liquid which is re-circulated. Because it is rather complicated to use a plurality of scrubber stages, usually only a single stage is used, and then the gas being discharged from the scrubber has only been in contact with a relatively dirty liquid, which has not been utilised at an optimum.

WO 97/18023 comprises an apparatus including a rotative heat transmission body for evaporating liquids or drying pumpable products. The apparatus comprises a scraper for continuously scraping solid deposits from the evaporation surface of the rotating heat transmission body. It has been found that when such a rotative heat transmission body is used for treating a mixture of liquid having different boiling points and a rotating atomising device is used for throwing droplets on to the evaporation surface of the heat transmission body, a rotating movement is also imparted to the vapour generated. Consequently, an exact counter-current movement between the two phases can not be obtained, and this is necessary to obtain an efficient rectification or scrubbing.

WO 91/01784 discloses an apparatus for rectification and gas scrubbing. Liquid is repeatedly thrown through the gaseous phase against an inner peripheral heat transmission surface. Spraying or atomising the liquid by means of a rotor causes a

pressure reduction where the liquid droplets leave the rotor and a corresponding pressure increase where the droplets are stopped. The pressure difference so created may partly be equalised by transverse gas flows at the end walls of the processing chamber and by a resulting axial flow within the apparatus impairing the efficiency of the apparatus.

5

The pumping effect caused by the liquid droplets being thrown radially outwardly by the atomising rotor is volumetrically far greater than the volume of the vapour flowing through the apparatus. The adverse result is that liquid droplets being thrown radially outwardly adjacent to an outlet for remanence come into contact with vapour having a relatively high content of the volatile component, and due to the equilibrium between the two phases the remanence will have a higher content of the volatile component than necessary. It is true that the evaporated vapour being exhausted through a vapour outlet at the other end of the apparatus adjacent to the inlet of the raw product to be processed has a high content of the volatile component. However, when it is mixed with re-circulated vapour the concentration of the volatile component of the distillate is reduced.

The calculation of the dimensions of an apparatus is normally based on a vapour flow rate of about 1 m/sec. When, for example, the specific weight of the vapour phase is 1 kg/m<sup>3</sup> a pressure difference of only 0.05 kg/m<sup>2</sup> and 0.82 kg/m<sup>2</sup> (equal to 0.82 mm water column) is necessary for obtaining a vapour flow rate of about 1 m/sec. and 4 m/sec., respectively. Thus, a very small pressure increase may cause a substantially re-circulation of the vapour whereby the efficiency is reduced. Therefore, it would be advantageous to be able to obtain a more efficient control of the vapour flow through the apparatus.

This problem is solved by the present invention. Thus, the present invention provides an apparatus for rectification of liquid mixtures and/or for scrubbing of gases, said apparatus comprising an elongated processing chamber extending in a substantially horizontal direction, means for supplying liquid into the processing chamber at a first end thereof, means for discharging liquid from the processing chamber at an opposite second end thereof, liquid application means, which may, for example, include a rotor, extending along at least a major part of the length of the chamber for repeatedly throwing supplied liquid transversely to the longitudinal axis of the processing chamber, means for supplying gas into the processing chamber at said second end, and means for discharging gas from the processing chamber at said first end so as to obtain a generally counter-current movement of liquid and gas through the processing chamber, and the apparatus

according to the invention is characterised in that the processing chamber is divided into interconnected sections or stages by means of a plurality of guide plates each extending across a major part of the cross-section of the processing chamber.

- 5 The guide plates provided in the apparatus according to the invention counteract the undesired axial re-circulation of gas phase due to the small radial pressure difference caused by the liquid being thrown radially outwardly towards the inner wall of the processing chamber as explained above. Thus, the guide plates render it possible to obtain a stepwise, controlled axial flow of the gas phase.

10

The processing chamber is preferably defined by a peripheral wall, such as a horizontally extending cylindrical wall, and a pair of opposite end walls. Preferably, at least one of the end walls comprises a releasable end wall part covering an opening, which is defined in the upper part of the end wall, said opening have dimensions sufficient to allow insertion

- 15 of guide plates into the chamber through such opening. The opening in the end wall may be used not only as a usual man hole, but also for inserting guide plates into and removing guide plates from the processing chamber, whereby the apparatus may be adapted to perform a desired task at an optimum.

- 20 The releasable end wall part covering said opening may be releasably fastened to the respective end wall in any suitable manner. In the preferred embodiment, however, the releasable end wall part is in the form of a cover with a flange, which may be connected to the end wall by screws or bolts. The guide plates may be fastened in position within the processing chamber in any suitable manner, for example by welding. In order to facilitate
- 25 changes in the arrangement of guide plates the inner peripheral wall of the processing chamber may comprise means for releasably fastening the guide plates at any of axially spaced, predetermined positions. Such releasable fastening means may, for example, comprise annular flanges fastened to and extending radially inwardly from the inner peripheral chamber wall. Thus, a larger number of such predetermined positions may be
- 30 prepared even though only a smaller number thereof are normally used.

The liquid application means or device may comprise a rotor defining a plurality of liquid collecting pockets or chambers opening in the direction of rotation. Such pocket may have a U-shaped cross-section and the width of the opening, the depth of the pocket and the



inclination of the side surfaces of the U-shape may then be selected so as to obtain the desired performance.

The rotor may be arranged at the bottom of the processing chamber where liquid having  
5 been thrown against the peripheral wall of the processing chamber be collected for re-circulation. The lower part of the rotor may then dip into the liquid. This may, however, cause undesired vibrations of the liquid. In the preferred embodiment the liquid application means comprise a liquid receiving chamber for receiving liquid flowing downwards along the inner peripheral wall of the processing chamber, the receiving chamber  
10 communicating with the liquid channel via an adjustable, longitudinally extending opening or slot. In this manner the flow of re-circulated liquid to the rotor may be controlled and stabilised. The liquid receiving chamber, may for example, be defined between the peripheral inner wall of the processing chamber and a flap or plate member, which is pivotal about a longitudinal axis so as to allow adjustment of a space defined between the  
15 lower edge of the flap member and the adjacent part of the inner wall of the processing chamber. This allows for the desired control of the liquid supply in a very simple manner. The flap or plate member and the adjacent part of the peripheral wall may define an upwardly open liquid collecting channel allowing for the desired axial transport of liquid through the processing chamber.

20

The guide plates may be shaped and arranged in any suitable manner preventing the undesired axial gas flow due to the pressure difference caused by the liquid being thrown by the rotor as explained above. Thus, consecutive guide plates may be formed and arranged so as to force gas flowing from the gas supplying means to the gas discharge  
25 means to follow a tortuous path and to flow in opposite, transverse directions. As an example, axially spaced consecutive guide plates may extend from opposite sides of the chamber in overlapping relationship. Alternatively, the guide plates may comprise annular plates each defining a central opening and intermediate plates, each of which is positioned between a pair of annular guide plates and covers the central openings.

30

At least some of the guide plates may define or comprise conduits for heating or cooling fluid, whereby they may function as heating or cooling panels.

In order to remove precipitated solid matter or solid matter formed in any other way the  
35 apparatus may further comprise conveyor means for removing such solid matter

separated in the processing chamber from the bottom part thereof. Such conveyor means may, for example, comprise a screw conveyor including a cylindrical housing communicating with the lower part of the processing chamber.

- 5 The invention will now be further described with reference to the drawings, wherein  
Fig. 1 is a cross section of an embodiment of the apparatus according to the invention,  
Fig. 2a is a horizontal, longitudinal sectional view of the apparatus shown in Fig. 1,  
Fig. 2b is a partial sectional view corresponding to that shown in Fig. 2a, but in a modified  
embodiment of the invention,  
10 Fig. 3 is a vertical sectional view of the embodiment shown in Figs. 1 and 2a,  
Fig. 4 is a cross-section of an embodiment having a conduit for a cooling or heating  
medium arranged on a guide plate,  
Figs. 4a and 4b illustrate details of the apparatus, and  
Fig. 5 is a vertical longitudinal section of the apparatus shown in Fig. 4.

15

The embodiments of the apparatus according to the invention shown in the drawings  
comprise a preferably cylindrical housing 1 having a substantial horizontal, longitudinal  
axis. A liquid application device or atomising device 2a is arranged within the housing and  
includes a rotor 2 rotatably journaled in housing end walls 3 at the bottom of the housing.

- 20 The lower part of the end walls 3 is formed as an integral part of the housing, while the  
upper parts of the housing end walls are in the form of covers 4 which may be bolted or  
otherwise releasably fastened to flanges 6. The end covers 4 are provided with a vapour  
inlet 10 and a vapour outlet 11. The vapour inlet 10 may be connected to an evaporator  
section (not shown) and the vapour outlet at the opposite end may be connected to a  
25 condenser (not shown) or possibly to the suction side of a heat pump. The housing 1 is  
divided into sections or chambers by means of axially spaced guide plates 7, 8 or 9. The  
end openings covered by the covers 4 have dimensions allowing the guide plates to be  
inserted into the housing 1 therethrough. This means, that the apparatus may be tested  
without guide plates, and that the guide plates may subsequently be mounted. The  
30 openings covered by the covers 4 may also serve as ordinary manholes.

- As shown in Fig. 3, an inlet 14 for a raw liquid product to be treated is arranged at the  
bottom of the housing 1 at the end of the housing, which is provided with the vapour  
outlet. An outlet 12 for remanence is arranged at the bottom of the container at its  
35 opposite end. In case reflux is used the reflux may be supplied through the inlet 14 and

the raw product to be treated may then be supplied through an inlet 13 positioned between the inlet 14 and the outlet 12.

- In the embodiment shown in Figs. 1, 2a and 3, the guide plates comprise axially spaced  
5 pairs of plates 7 and 8 extending from opposite sides of the peripheral wall 5 of the housing and defining a central opening there between. A vertical, substantially rectangular guide plate 9 is arranged between consecutive pairs of guide plates 7 and 8 so as to cover and extend transversely beyond the central openings defined by the plates 7 and 8. Openings are defined between the peripheral housing wall 5 and the opposite sides of  
10 each guide plate 9. The area of the opening defined between each pair of plates 7 and 8 is preferably substantially the same as the combined areas of the openings defined on opposite sites of each guide plate 9 and of the cross-sectional area defined between consecutive, axially spaced guide plates.
- 15 Liquid droplets being thrown out from the atomising rotor 2 define carpet-like patterns 15. The thrown out droplets obtain a velocity and direction being the sum of the vector defining the peripheral velocity of the rotor and the vector defining the rate at which the liquid flows across the outer edge 16 of a rotor pocket 22. From this position the liquid will continue in the said direction towards the peripheral housing wall 5. On this basis it may  
20 be calculated how long time it will take before a droplet reaches the inner surface of the peripheral wall 5 and how much the angular position of the rotor has changed in this time period. By such calculations the inner and outer ends of the carpet-like pattern 15 may be determined. Intermediate points of the pattern may be calculated in the same manner, but further factors are influencing the shape of the pattern. Therefore, the droplet patterns 15  
25 illustrated in Fig. 1 are based on observations made when exposed to stroboscopic light. It is then possible clearly to watch the development of the process within the processing chamber and the varying volumes defined between the rotating carpet-like patterns 15 of droplets, and the need for a controlled axial flow of the vapour is evident.
- 30 The inner diameter of the peripheral housing wall is preferably selected such that the flow rate of the gas phase or vapour in an inward and an outward direction between the guide plates is about 1 m/sec. If, for example, the diameter of the housing wall is about 1.25 m it will take  $0.5 \text{ m} : 1 \text{ m/sec.} = 0.5 \text{ sec.}$  for a particle to move outwardly from the centre in a horizontal plane, and in this period the vapour or gas phase several times comes into  
35 contact with liquid when passing a carpet-like pattern 15 of liquid droplets. If, for example,

the atomising rotor 2 rotates at 9.5 revolutions/sec. and the rotor is provided with 8 pockets the gas phase or vapour will come into contact with a carpet-like droplet pattern 38 times when passing transversely through a passage defined between a pair of guide plates (corresponding to a column bottom). As seen in Fig. 2, the carpet-like patterns 15 of liquid droplets between a pair of guide plates 7 and 8 define gas or vapour volumes, which at first are increased and subsequently are decreased. Therefore, the liquid droplets are forced to penetrate into the gas or vapour volume whereby an almost complete equilibrium between liquid and vapour is obtained. Thus, the distance between two consecutive pairs of guide plates 7 and 8 represents two column bottoms with high efficiency.

In the embodiment shown in Fig. 2a the droplets forming a pattern 15 starts in the passage 17. In this passage the vapour or gas flows from the centre outwardly towards the peripheral housing wall 5 and is then reversed so as to flow backwards towards the centre on the other side of the rectangular guide plate 9. Thus, the gas or vapour will first flow counter-currently to the liquid thrown out by the rotor 2 and then concurrently when flowing back towards the centre. Therefore, when the gas or vapour is flowing outwardly the patterns 15 of droplets are counteracting the gas flow, while the patterns or droplets will promote the flow of gas or vapour towards the centre of the apparatus. However, because the carpet-like pattern 15 is moving at a velocity considerably higher than the flow rate of the gas or vapour the dragging along of the gas, when flowing concurrently, can compensate for a substantial part of the pressure loss when flowing counter-currently, and the resulting pressure loss for each pair of associated "column bottoms" will therefore be small and the system will be suited for operation in connection with a heat pump.

25

With the arrangement of guide plates 7-9 described above the vapour is divided into oppositely directed flows 17 and 18 whereby an optimum utilisation of the total volume of the housing 1 is obtained. Alternatively, the guide plates 20 and 21 may be arranged as shown in fig. 2b, whereby a single, undivided flow of vapour or gas, which is alternately counter-current and concurrent with the carpet-like patterns 15 of liquid droplets, is obtained. In each single transverse passage defined between the guide plates 20 and 21 and representing a column bottom the double number of contacts between liquid and vapour is obtained compared to the embodiment described above. However, the apparatus will then be larger. The guide plates 20 and 21 are alternatingly fastened to opposite sides of the peripheral housing wall 5. The guide plates 20 and 21 may have an

35

outline as a segment of a circle so that an axial passage is defined between a vertical, linear edge of each guide plate and an adjacent part of the peripheral housing wall 5. The area of this axial passage is preferably substantially the same as the cross-sectional area of the passage defined between adjacent guide plates 20 and 21.

5

The guide plates may be releaseably fastened to narrow rings or annular flanges 37, which are welded to the inner surface of the peripheral housing wall 5. In most cases it is desirable to allow fastening of the guide plates with a relatively small axial spacing. This may be obtained by means of a fastening arrangement as that shown in Figs. 4a and 4b.

- 10 The annular flanges 37 welded to the peripheral housing wall 5 have a relatively small radial width and a relatively small thickness, and the outer dimension of the guide plates 7-9 corresponds - with a suitable clearance - to the inner diameter of the welded annular flange 37. The guide plates may be releasably fastened by means of a separate ring 38 having threaded holes formed therein, and releasable fastening members 39 comprising
- 15 screws or bolts for clamping a guide plate and a fixed annular flange 37 between the separate ring 38 and an oppositely arranged abutment member co-operating with screws or bolts.

- As illustrated in fig. 4, the liquid application device 2a comprises a rotor 2 which is made
- 20 from a central tubular body, and longitudinally extending liquid throwing devices defining the open, U-shaped pockets 22 are welded to the outer surface of the tubular body. The rotor 2 is positioned such that part of each liquid throwing device is dipped into liquid collected at the bottom of the housing or processing chamber. The maximum depth 24 to which the front edge 16 of each liquid throwing device is dipped into the liquid determines
- 25 the amount of liquid received in each of the U-shaped pockets and also the power necessary for throwing the liquid from the rotor. Such power is also used for controlling the amount of liquid within the apparatus.

- The liquid thrown out comes into contact with the gas phase and then hits the inner
- 30 surface of the peripheral housing wall 5, and the part first being thrown out will then flow down into an upwardly open channel 25 serving to stabilise the transverse liquid flow to the atomising rotor and to allow for the axial liquid flow through the apparatus. The channel 25 is defined between a flap member or plate member 26 extending along the total length of the housing and by the adjacent part of the inner housing wall 5. The lower
- 35 edge 27 of the flap member is positioned close to the bottom of the housing so as to

define an adjustable spacing or slot 28 between the lower edge 27 and the adjacent part of the peripheral wall 5. The upper edge 29 of the flap member 26 is pivotally mounted by means of lugs 32 extending inwardly from the peripheral housing wall 5. The dimensions and the position of the flap member 26 is such that the size of the channel cross section is  
5 sufficient to allow axial flow of the liquid through the housing involving a necessary lowering of the liquid level. The liquid level will also vary in response to the adjustment of the width of the slot 28. The width of the slot 28 may be adjusted by means of an adjusting device 30 shown in Fig. 4b. However the adjusting device may also be made in any other suitable manner.

10

The flow of liquid from the pockets 22 will start as soon as the liquid reaches the front edge 16 of the liquid throwing device. If the pockets 22 are completely filled, the throwing of liquid will start immediately, and the first part will hit the oblique flap member 26. Due to its inertia the liquid will continue to flow over the upper edge 29 of the flap member and  
15 down into the channel 25. It is preferred that the rotor pockets 22 be filled only to such an extent that the liquid first being thrown out from the pockets will almost clear the flap member or plate member 26. The width of the slot 28 may be adjusted such that the pockets 22 are not filled too much.

20 The amount of liquid being atomised varies to a high extent in response to the extent to which the rotor 2 is immersed into the liquid. Thus, a change of the liquid level of only a few millimetres gives rise to a very substantial change of the amount of liquid being atomised. Therefore, the difference in liquid level, which can be tolerated along the length of the housing, is not sufficient to secure the desired axial flow of liquid through the  
25 apparatus. This problem is solved by the provision of the channel 25 in which a decreasing liquid level along the length of the channel does not give rise to problems.

Because of the efficient contact between the liquid and the gaseous components an apparatus of the type described is also suitable for use as a gas scrubber. By using a  
30 multi-stage apparatus the necessary amount of washing liquid may be considerably reduced. In addition, the gas leaving the last stage comes into contact with fresh washing liquid.

When the apparatus is used as a scrubber it may often be an advantage also to cool the  
35 gas flowing through the apparatus. In order to allow such cooling the guide plates may

define passages therein for a cooling fluids, or the cooling fluid may be passed through a conduit arrangement 33 mounted on the guide plates. Guide plates having passages formed therein may suitably be used when the difference between the pressure of the cooling fluid and the pressure within the scrubber is moderate. However, when the  
5 desired temperature is such that it is necessary to use a refrigerator system including a mechanical heat pump the necessary strength of the heat transmission surface may more easily be obtained by using a conduit arrangement 33. This arrangement is shown only schematically because the need for cooling/heating may vary substantially depending on the problem to be solved. As an example, heat supply may be desirable when a heat  
10 pump is used in connection with rectification, wherein the energy supplied as the power consumption of the heat pump may be insufficient to compensate for loss of heat to the ambience, or loss of heat due to lacking condensation heat when an extra fraction is taken out. In such case the conduit arrangement 33 may function as an evaporator and be placed in connection with the first stage, because the vapour developed must contribute  
15 to the rectification. In case of gas scrubbing there is preferably a need for cooling and it may then be advantageous to distribute the cooling conduits over a plurality of the guide plates.

When scrubbing a gas flow containing solid particles as well as by treating a mixture of  
20 gas and vapour, wherein the vapour components may be condensed by cooling and be precipitated as solids at the lower temperature, problems may arise to obtain an axial transport of the solid particles. Providing a screw conveyor 34 below the bottom of the housing 1 may solve this problem. The screw conveyor 34 is arranged within a tubular housing 35 and is communicating with the lower part of the scrubber housing along the  
25 total length thereof. Thus, precipitated or sedimented particles or salts may move into the conveyor housing 35 and be transported to an outlet 36 for solids by means of the slowly rotating conveyor screw 34. The arrangement operates more efficiently when the mixture of washing liquid and solid particles is removed at the lowest possible temperature. The maximum heat transfer will take place at the inlet 10 for the hot gas. Furthermore, it is  
30 important that scrubbing takes place with washing liquid being as clean as possible at the outlet 11 for the cleaned gas. Therefore the best position for the outlet 36 for liquid and solid particles is about the middle of the apparatus or housing. Because minor precipitation may take place also in the later half of the housing the pitch of the conveyor screw 34 must be oppositely directed. In Fig. 5 the washing liquid is supplied to the  
35 apparatus at 40.

## Claims

- 5 1. An apparatus for rectification of liquid mixtures and/or for scrubbing of gases, said apparatus comprising
- an elongated processing chamber extending in a substantially horizontal direction,  
means for supplying liquid into the processing chamber at a first end thereof,  
means for discharging liquid from the processing chamber at an opposite second  
10 end thereof,
- liquid application means including extending along at least a major part of the length of the chamber for repeatedly throwing supplied liquid transversely to the longitudinal axis of the processing chamber,
- means for supplying gas into the processing chamber at said second end, and  
15 means for discharging gas from the processing chamber at said first end so as to obtain a generally counter-current movement of liquid and gas through the processing chamber,
- Characterised in that the processing chamber is divided into interconnected sections or stages by means of a plurality of guide plates each extending across a major  
20 part of the cross-section of the processing chamber.
2. An apparatus according to claim 1, wherein the processing chamber is defined by a peripheral wall and a pair of opposite end walls, at least one of the end walls comprising a releasable end wall part covering an opening, which is defined in the upper part of the end  
25 wall, said opening having dimensions sufficient to allow insertion of guide plates into the chamber through such opening.
3. An apparatus according to claim 2, wherein the releasable end wall part is in the form of a cover with a flange connected to the end wall by screws or bolts.
- 30 4. An apparatus according to any of the claims 1-3, wherein the inner peripheral wall of the processing chamber comprises means for releasable fastening said guide plates at any of axially spaced, predetermined positions.



5. An apparatus according to claim 4, wherein the releasable fastening means comprise annular flanges fastened to and extending radially inwardly from said inner peripheral chamber wall.
- 5 6. An apparatus according to any of the claims 1-5, wherein the liquid application means comprise a rotor defining liquid collecting pockets or chambers opening in the direction of rotation.
7. An apparatus according to claim 6, wherein the liquid application means further  
10 comprise an upwardly open liquid channel extending axially along the lower part of the processing chamber and having opposite ends, which are in communication with the liquid supplying means and the liquid discharging means, respectively, at least the lower part of the rotor being arranged within the liquid channel.
- 15 8. An apparatus according to claim 7, wherein the liquid application means comprise a liquid receiving chamber for receiving liquid flowing downwards along the inner peripheral wall of the processing chamber, the receiving chamber communicating with the liquid channel via an adjustable, longitudinally extending opening or slot.
- 20 9. An apparatus according to claim 8, wherein the liquid receiving chamber is defined between the peripheral inner wall of the processing chamber and a flap or plate member being pivotal about a longitudinal axis so as to allow adjustment of a space defined between the lower edge of the flap member and the adjacent part of the inner wall of the processing chamber.
- 25 10. An apparatus according to any of the claims 1-9, wherein consecutive guide plates are formed and arranged so as to force gas flowing from the gas supplying means to the gas discharge means to follow a tortuous path and to flow in opposite, transverse directions.
- 30 11. An apparatus according to any of the claims 1-10, wherein at least some of the guide plates define or comprise conduits for a heating or cooling fluid.
12. An apparatus according to any of the claims 1-11, further comprising conveyor means for removing solid matter separated in the processing chamber from the bottom part  
35 thereof.

13. An apparatus according to claim 12, wherein the conveyor means comprise a screw conveyor including a cylindrical housing communicating with the lower part of the processing chamber.

5

**AMENDED CLAIMS**

[received by the International Bureau on 27 July 2000 (27.07.00);  
original claims 1 to 13 replaced by new claims 1 to 13 (3 pages)]

1. An apparatus for rectification of liquid mixtures and/or for scrubbing of gases, said apparatus comprising

5        an elongated processing chamber (1) extending in a substantially horizontal direction and being divided into interconnected sections or stages by means of a plurality of guide plates (7-9; 20, 21) each extending across a major part of the cross-section of the processing chamber,

         means (14) for supplying liquid into the processing chamber at a first end thereof,

10       means (12) for discharging liquid from the processing chamber at an opposite second end thereof,

         a liquid atomising means (2a) arranged at the bottom of the processing chamber and extending along at least a major part of the length of the chamber for repeatedly throwing supplied liquid transversely to the longitudinal axis of the processing chamber,

15       means (10) for supplying gas into the processing chamber at said second end, and

         means (11) for discharging gas from the processing chamber at said first end so as to obtain a generally counter-current movement of liquid and gas through the processing chamber

20       characterised in that the liquid atomising means (2a) comprise a rotor (2) defining liquid collecting pockets or chambers (22) having a U-shaped cross-section opening in the direction of rotation and being adapted to throw the liquid so as to form rotating carpet-like patterns of droplets extending from the outer edge (16) of each pocket towards the inner wall of the processing chamber.

25

2. An apparatus according to claim 1, wherein the liquid atomising means (2a) further comprise the bottom part of the processing chamber, which at opposite ends thereof is in communication with the liquid supply means (14) and the liquid discharging means (12), respectively, at least the lower part of the rotor dipping into liquid collected at said bottom

30 part.

3. An apparatus according to claim 2, wherein the liquid atomising means (2a) further comprise a liquid receiving chamber or channel (25) for receiving liquid flowing downwards along the inner peripheral wall of the processing chamber, the liquid receiving

channel (25) communicating with the bottom part of the processing chamber via an adjustable, longitudinally extending opening or slot (28).


4. An apparatus according to claim 3, wherein the liquid receiving channel (25) is defined  
5 between the peripheral inner wall of the processing chamber and a flap or plate member (26) being pivotal about a longitudinal axis so as to allow adjustment of a space or slot (28) defined between the lower edge of the flap member and the adjacent part of the inner wall of the processing chamber.
- 10 5. An apparatus according to any of the claims 1-4, wherein the processing chamber is defined by a peripheral wall and a pair of opposite end walls (3), at least one of the end walls comprising a releasable end wall part (4) covering an opening, which is defined in the upper part of the end wall, said opening having dimensions sufficient to allow insertion of guide plates into the chamber through such opening.  
15
6. An apparatus according to claim 5, wherein the releasable end wall part is in the form of a cover (4) with a flange connected to the end wall by screws or bolts.
7. An apparatus according to any of the claims 1-6, wherein the inner peripheral wall (5) of  
20 the processing chamber comprises means (37-39) for releasable fastening said guide plates (7-9; 20,21) at any of axially spaced, predetermined positions.
8. An apparatus according to claim 7, wherein the releasable fastening means comprise annular flanges (37) fastened to and extending radially inwardly from said inner peripheral  
25 chamber wall.
9. An apparatus according to any of the claims 1-8, wherein the guide plates (7-9; 20, 21) extend substantially at right angles to the longitudinal axis of the processing chamber (1).
- 30 10. An apparatus according to any of the claims 1-9, wherein consecutive guide plates are formed and arranged so as to force gas flowing from the gas supplying means (10) to the gas discharge means (11) to follow a tortuous path and to flow in opposite, transverse directions.

11. An apparatus according to any of the claims 1-10, wherein at least some of the guide plates define or comprise conduits (33) for a heating or cooling fluid.

12. An apparatus according to any of the claims 1-11, further comprising conveyor means  
5 (34) for removing solid matter separated in the processing chamber from the bottom part thereof.

13. An apparatus according to claim 12, wherein the conveyor means comprise a screw conveyor (34) including a cylindrical housing (35) communicating with the lower part of the  
10 processing chamber.

1/5

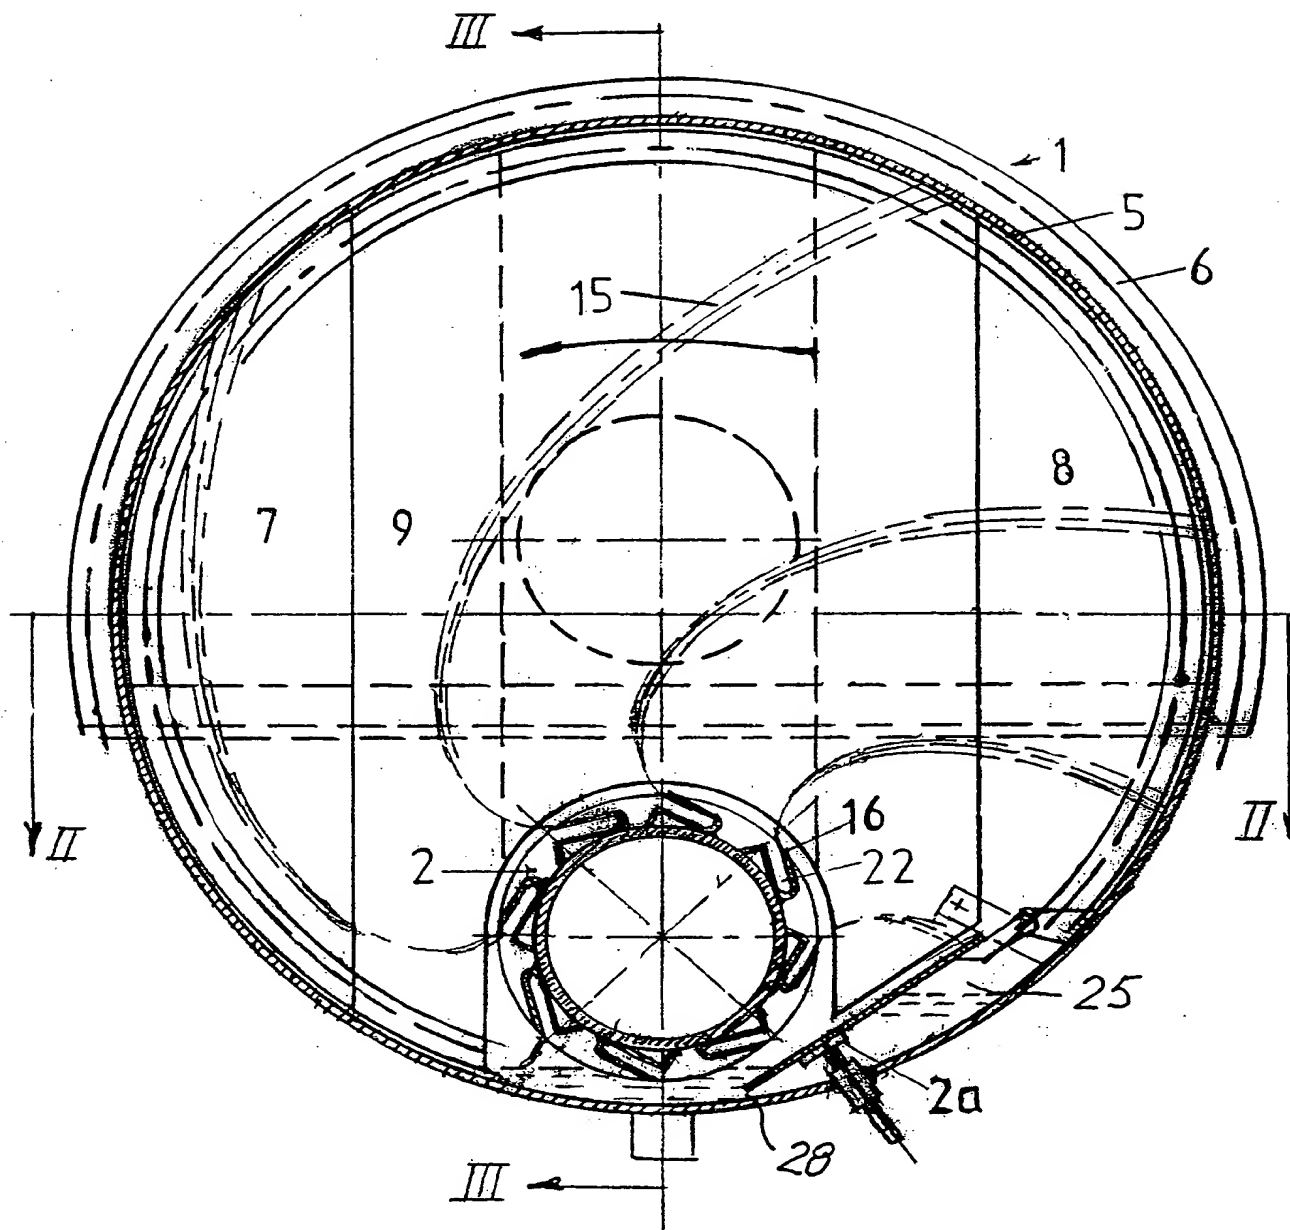


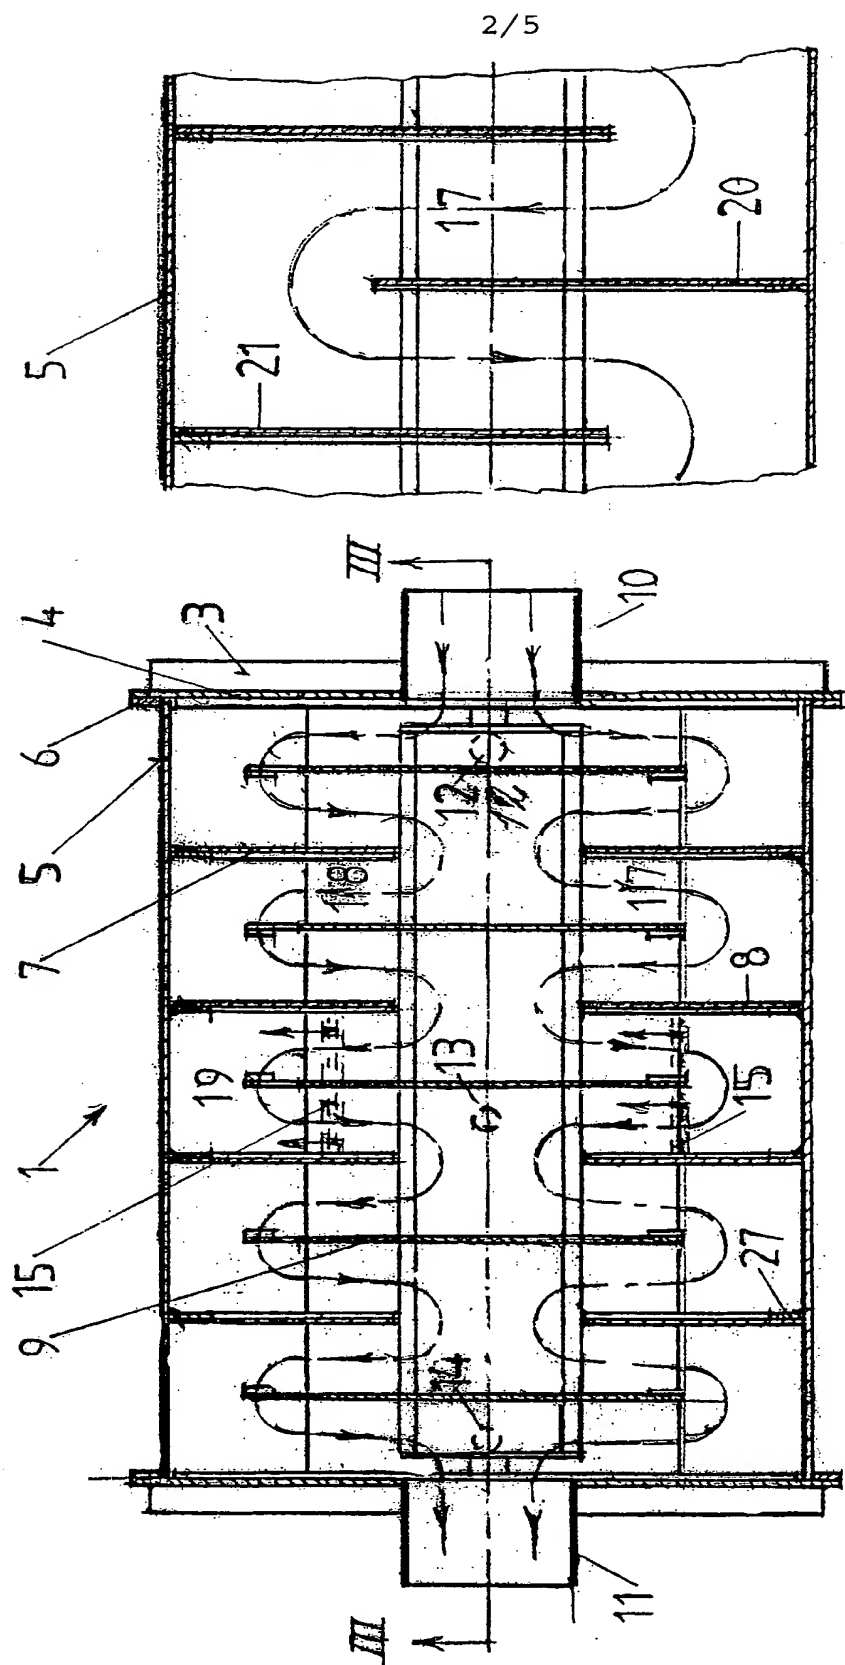


FIG 2 *a* *b*



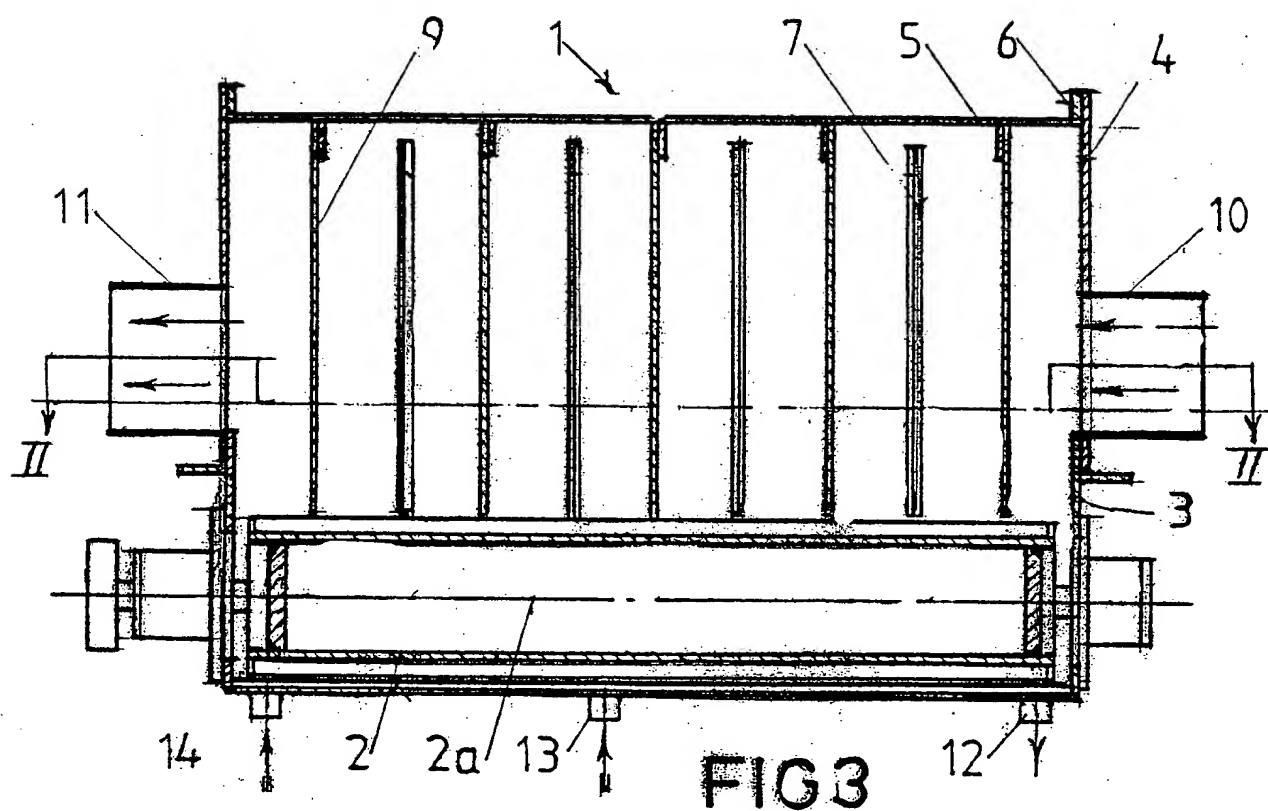

4/5



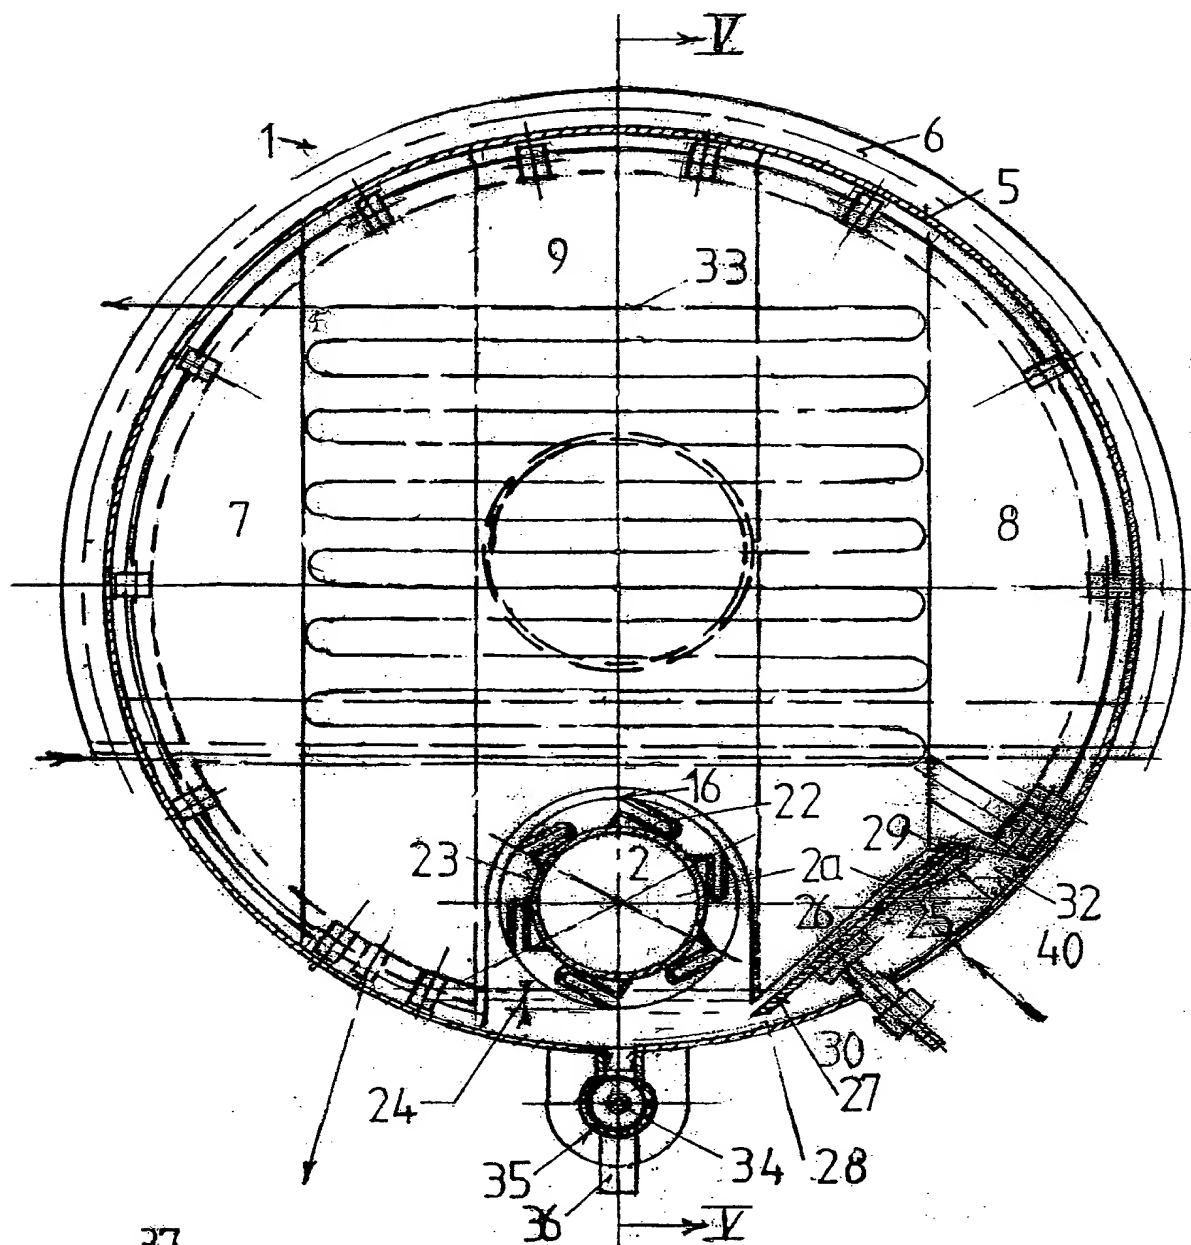


FIG 4




a

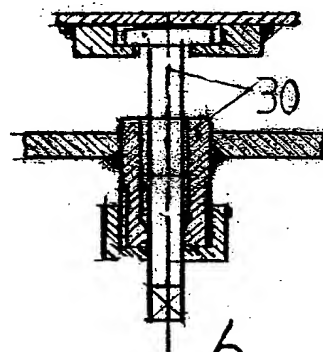

b

5/5

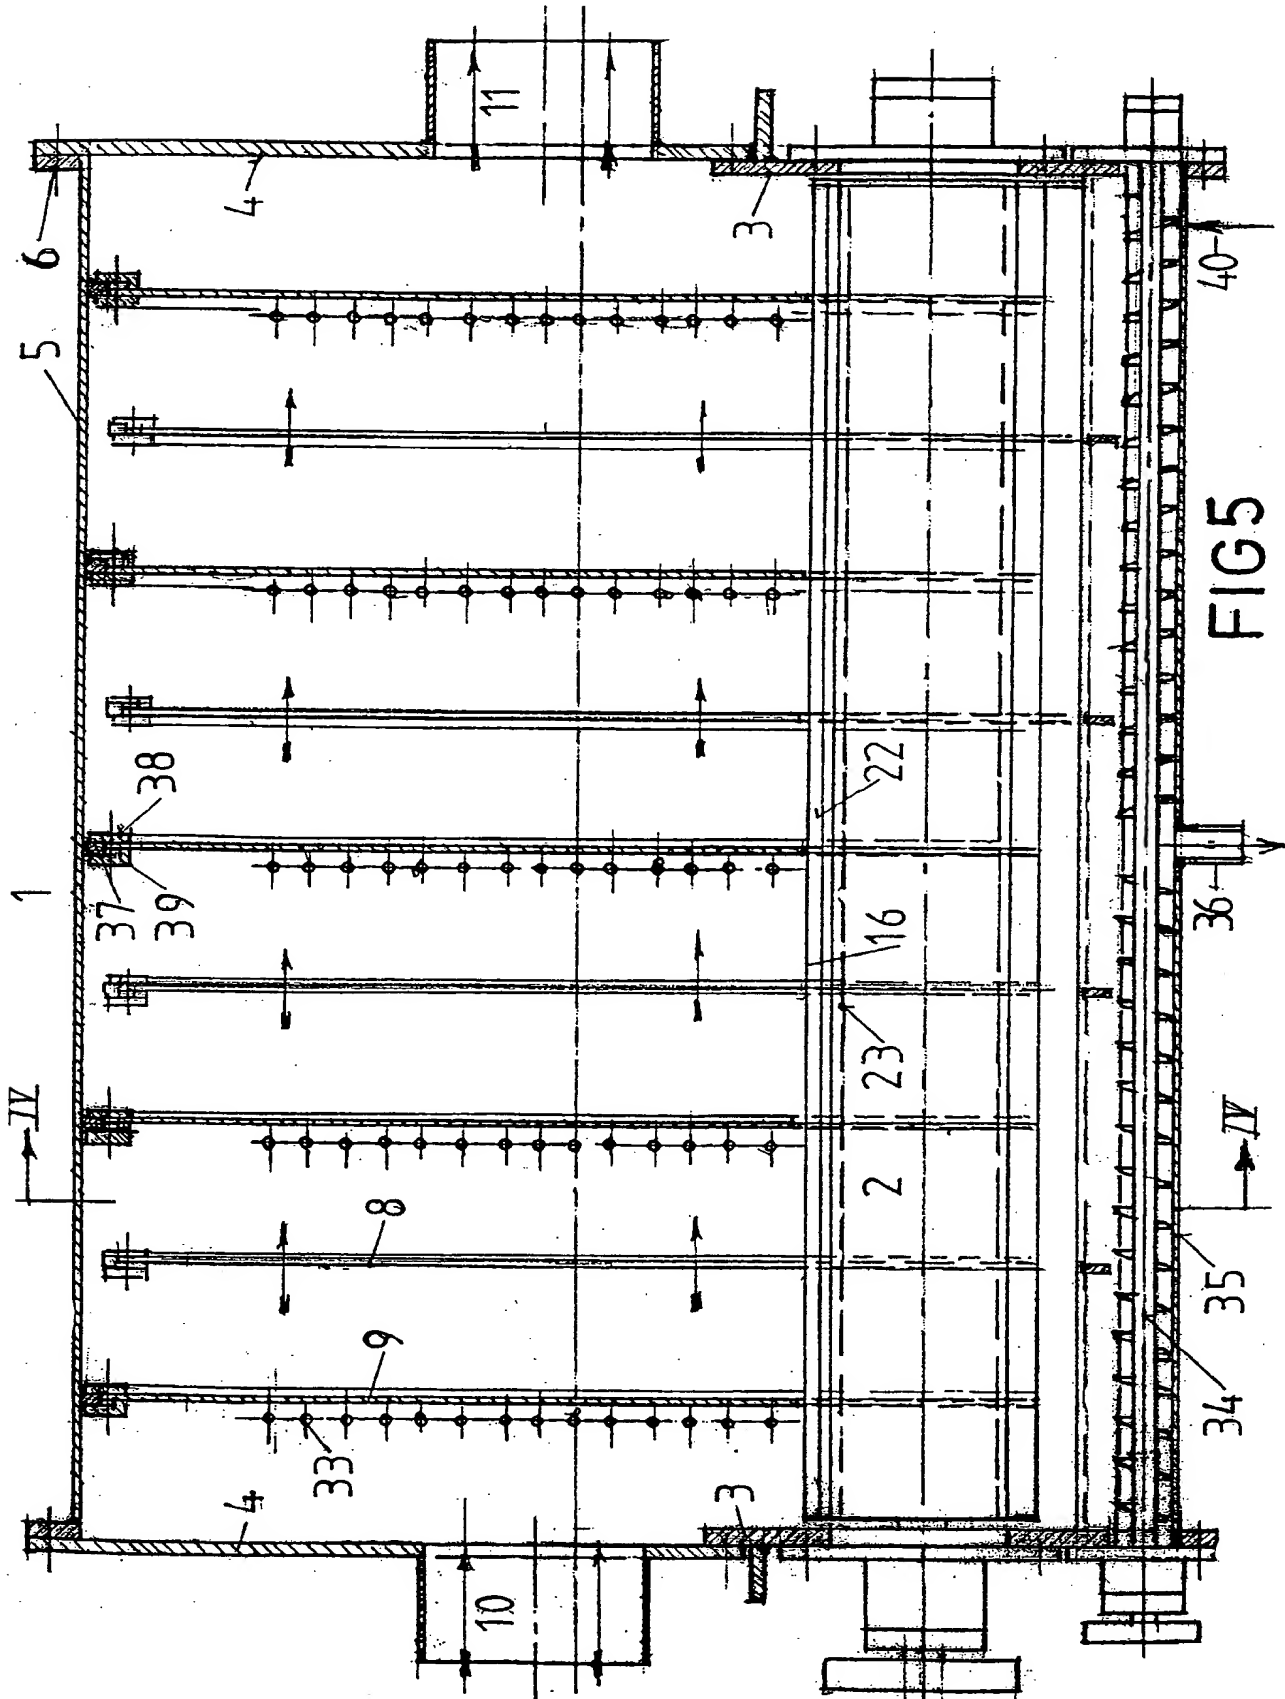

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 00/00086

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B01D 3/08, B01D 47/18, B01D 53/78

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 1054421 B (STANDARD FILTERBAU-GESELLSCHAFT M.B.H.), 9 April 1959 (09.04.59), column 1, line 39 - column 4, line 2, figures 1-2, claim 1 --	1-13
X	Derwent's abstract, No 91- 13543/02, week 9102, ABSTRACT OF SU, 1544-463 (YAVORSKII V T), 23 February 1990 (23.02.90) --	1
A	EP 0494154 B1 (JENSEN, ERIK), 15 July 1992 (15.07.92), claims, figures -- -----	1-13

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

16 May 2000

15 -06- 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Ulf Nyström/MP

Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/DK 00/00086

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 1054421 B	09/04/59	NONE	
EP 0494154 B1	15/07/92	SE 0494154 T3	
		DE 69022427 D,T	07/03/96
		DK 372689 A	29/01/91
		WO 9101784 A	21/02/91